

DSmT Applied to Seismic and Acoustic Sensor Fusion

Erik P. Blasch

Defence R&D Canada-Valcartier
2459 Pie-XI Blvd. North
Québec City, QC G3J 1X5
erik.blasch@drdc-rddc.gc.ca

Jean Dezert

ONERA DTIM/SIF
Chemin de la Humière
91761 Palaiseau Cedex, France
jdezert@onera.fr

Pierre Valin

Defence R&D Canada-Valcartier
2459 Pie-XI Blvd. North
Québec City, QC G3J 1X5
Pierre.valin@drdc-rddc.gc.ca

Abstract – *In this paper, we explore the use of DSMT for seismic and acoustic sensor fusion. The seismic/acoustic data is noisy which leads to classification errors and conflicts in declarations. DSMT affords the redistribution of masses when there is a conflict. The goal of this paper is to present an application and comparison on DSMT with other classifier methods to include the support vector machine(SVM) and Dempster-Shafer methods. The work is based on two key references (1) Marco Duarte with the initial SVM classifier application of the seismic and acoustic sensor data and (2) Arnaud Martin in Vol. 3 with the Proportional Conflict Redistribution Rule 5/6 (PCR5/PCR6) developments. By using the developments of Duarte and Martin, we were able to explore the various aspects of DSMT in an unattended ground sensor scenario. Using the receiver operator curve (ROC), we compare the methods for individual classification as well as a measure of overall classification using the area under the curve(AUC). Conclusions of the work show that the DSMT affords a lower false alarm rate because the conflict information is redistributed over the set masses and is comparable to other classifier results when using a maximum decision forced choice.*

Keywords: *Information Fusion, DSMT, PCR5, PCR6, Area Under the Curve(AUC), SVM.*

1 Introduction

The goal of this paper is to present an application and comparison on DSMT with other classifier methods. The work is based on two key references (1) Marco Duarte with the initial classifier application of the seismic and acoustic sensor data [1] and (2) Arnaud Martin in Vol. 3 for the implementation of the DSMT methods. [2] By using the developments of Duarte and Martin, we were able to explore the various aspects of DSMT in an unattended ground sensor scenario. In the exploration of information fusion metrics for classification, there is a need to develop metrics of effectiveness that support the user's utility needs [3] and can vary over the sensor types, environmental conditions, targets of interest, situational context, and users [4].

DSmT is an extension to the Dempster-Shafer method of evidential reasoning which has been detailed in numerous papers and texts: *Advances and applications of DSmT for information fusion (Collected works)*, Vols. 1-3 [5].

In 2002, Dezert [6] introduced the methods for the reasoning and in 2003, presented the hyper power-set notation for DSmT [7]. Recent applications include the DSmT Proportional Conflict Redistribution rule 5 (PCR5) applied to target tracking [8].

The key contributions of DSmT are the redistributions of masses such that no refinement of the frame Θ is possible unless a series of constraints are known. For example, Shafer's model [9] is the DSm hybrid model in DSmT. Since Shafer's model, authors have continued to refine the method to more precisely address the combination of conflicting beliefs [10, 11, 12] and generalization of the combination rules [13, 14]. An adaptive combination rule [15] and rules for quantitative and qualitative combinations [16] have been proposed. Recent examples for sensor applications include electronic support measures, [17, 18] and physiological monitoring sensors [19]. One application of DSmT that has not been fully explored is in seismic, magnetic, and acoustic classification fusion of moving targets. Kadambe conducted an information theory approach [20] and used DSmT as integrity constraints [21], but did not take advantage of the conflict redistribution.

Detecting moving vehicles in an urban area [22] is an example where DSmT conflicting mass redistribution could be helpful [8]. Detecting traffic can be completed by fixed ground cameras or on dynamic unattended ground vehicles (UGVs). If the sensors are on UGVs, path planning is needed to route the UGVs to observe the traffic [23, 24] and cooperation among UGVs is necessary[25]. The DARPA Grand Challenge featured sensors on mobile UGVs observing the environment [26]. Mobile sensing can be used to orient [27] or conduct simultaneous location and mapping (SLAM) [28].

Deployed ground sensors can observe the vehicles; however they are subject to the quality of the sensor measurements as well as obscurations. One interesting question is how to deploy the fixed sensors that optimize the performance of a system. Efforts in distributed wireless networks (WSNs) have resulted in many issues in distributed processing, communications, and data fusion [29]. In a dynamic scenario, resource coordination [30] is needed for both context assessment, but also the ability to be aware of impending situational threats [31, 32]. For distributed sensing systems, to combine sensors, data, and user analysis requires pragmatic approaches to metrics [33, 34, 35, 36]. For example, Zahedi [37] develops a

QOI architecture for comparison of centralized versus distributed sensor network deployment planning.

Information fusion has been interested in the problems of databases for target trafficability (i.e. terrain information) [38], sensor management [39], and processing algorithms [40] from which to assess objects in the environment. Various techniques have incorporated grouping object movements [41], road information [42, 43], and updating the object states based on environmental constraints [44]. Detecting, classifying, identifying and tracking objects [45] has been important for a variety of sensors, including 2D visual, radar [46], and hyperspectral [47] data; however newer methods are of interest for ground sensors with 1D signals.

Seismic data provides passive sensing of ground vibrations which can be used for motion tracking. Passive magnetic sensing can detect hidden objects that might indicate intent. Finally, acoustic data can be used for signature detection from vehicle engines. [48] The DARPA SENSIT program investigated deploying a distributed set of wireless sensors along a road to classify vehicles as shown in **Figure 1**.

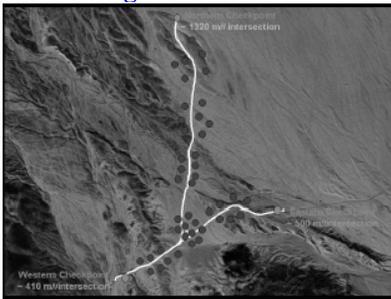


Figure 1. SENSIT Data from [M. F. Duarte and Y. H. Hu, "Vehicle Classification in Distributed Sensor Networks," 2004 [49]

The sensors include acoustic and seismic signals. Given the deployed set of sensors, feature vectors were used to classify signals based on the data from the seismic and acoustic signals. [49] Various approaches include combining the data with decision fusion [50], value fusion [51], and simultaneous track and identification methods [52, 53]. Information theoretical approaches including the KL method were applied to the data for sensor management [54] as shown in **Figure 2**. Processing sensor data for target classification using acoustic [55, 56] and seismic [57] results have been explored in support of information theoretical sensor placement [58].

Much work has been completed using imaging sensors and radar sensors for observing and tracking targets. Video sensors are limited in power and subject to day/night conditions. Likewise, radar line-of site precludes them from observing in the same plane. Together, both imaging and radar sensors do not have the advantage of UGSs which can power on and off, can work for a long time on battery power, and can be deployed to remote areas.



Figure 2. Deployed Sensors. From S. Kadambe and C. Daniell, "Theoretic Based Performance of Distributed Sensor Networks", *AFRL-IF-RS-TR-2003*, 231, October 2003. [54]

Track management situational awareness tools receive input from sensor feeds (examples include electro-optical, radar, electronic support measures (ESMs), and sonar) and display this information to a user. User inputs include: creation of new objects, such as tracks, contacts and targets. Methods to reduce data-to-decisions include: fusing multiple tracks into a single track, incorporating alerting mechanisms, or visualizing track data common operational picture (COP). Sensor and track data can grow rapidly as the user desires to keep historical data.

Our goal is to utilize the DSMT method for the fusion of information from seismic and acoustic data in which each sensor/classifier is in direct conflict with the other sensor. We address (1) intelligent use of the data based on value for classification, (2) DSMT sensor data fusion for detection, classification, and positional location, and (3) metrics to support the sensor and data management as supporting a user control.

2 Location / Detection

We desire to track and identify the targets based on the sensor reports. In this study, we concentrate on the classification of targets which can be used with the kinematic/position information for target identification.

2.1 Sensor Information Management

The goal is to utilize the UGSs sensors which may be acoustic, magnetic, seismic, and PIRoelectric (passive infrared for motion detection). With a variety of sensors, information fusion can (a) utilize the most appropriate sensor at the correct time, (b) combine information from both sensors on a single platform, (c) combine results from multiple platforms, and (d) cue other sensors in a hand-off fashion to effectively monitor the area. Sensor exploitation requires an analysis of feature generation, extraction, and selection or (construction, transformation, selection, and evaluation). To provide track and ID results, we develop method or target classification.

2.2 Sensor Classification

Sensor exploitation includes detection, recognition, classification, identification and characterization of some object. Individual classifiers can be deployed at each level to robustly determine the object information. Popular methods include voting, neural networks, fuzzy logic, neuro-dynamic programming, support vector machines, Bayesian and Dempster-Shafer methods. One way to ensure the accurate assessment is to look at a combination of classifiers. Combination of classifiers [59] could include different sensors with classifiers, different methods over a single or multiple sensors, and various hierarchies of coordinating the classifiers such as Bayes nets and distributed processing.

Issues in classifier combination methods need to be compared as related to decisions, feature sets, and user involvement. Selecting the optimal feature set is based on the situation and environmental context of which the sensors are deployed. An important question for sensor and data management is measures of effectiveness. For instance, what is the quantification of fusion/decision gain using a set of classification methods and placement methods? There is a need for a robust combination rule that includes the location and detection of the sensors subject to the target and environmental constraints. Typically, a mobile sensor needs to optimize its route and can be subject to interactive effects of pursuers and evaders with other targets [60] as well as active jamming of the signal [61].

Detecting targets from seismic and acoustic data in a distributed net centric fashion requires pragmatic approaches to sensor and data management. [62] To robustly track and ID a target requires both the structured data from the kinematic movements as well as the unstructured data for the feature analysis. [63]

3 DSMT

Here we use PCR6 and PCR5 and the DSMP selections which are discussed below. We replace Smets' rule [10] by the more effective Proportional Conflict Redistribution rule no. 5 (PCR5) or eventually the more simple PCR rule no. 6 (PCR6) and replace the pignistic transformation by the more effective DSMP transformation to estimate target classification probabilities. All details, justifications with examples on PCR5 and PCR6 fusion rules and DSMP transformation can be found freely from the web in the DSMT compiled texts [5], Vols. 2 & 3..

3.1 PCR5 and PCR6 fusion rules

In DSMT (Dezert-Smarandache Theory) framework, the Proportional Conflict Redistribution Rule no. 5 (PCR5) is used generally to combine the basic belief assignment (bba)'s. PCR5 transfers the conflicting mass only to the elements involved in the conflict and proportionally to their individual masses, so that the specificity of the

information is entirely preserved in this fusion process. Let $m_1(\cdot)$ and $m_2(\cdot)$ be two independent bba's, then the PCR5 rule is defined as follows (see [5], Vol. 2 for full justification and examples): $m_{PCR5}(\emptyset) = 0$ and $\forall X \in 2^\Theta \setminus \{\emptyset\}$

$$m_{PCR5}(X) = \sum_{\substack{x_1, x_2 \in 2^\Theta \\ x_1 \cap x_2 = X}} m_1(x_1)m_2(x_2) + \sum_{\substack{X_2 \in 2^\Theta \\ X_2 \cap X = \emptyset}} \left[\frac{m_1(X)^2 m_2(X_2)}{m_1(X) + m_2(X_2)} + \frac{m_2(X)^2 m_1(X_2)}{m_2(X) + m_1(X_2)} \right]$$

where all denominators in the equation above are different from zero. If a denominator is zero, that fraction is discarded. Additional properties of PCR5 can be found in [64]. Extension of PCR5 for combining qualitative bba's can be found in [5], Vol. 2 & 3. All propositions/sets are in a canonical form. A variant of PCR5, called *PCR6* has been proposed by Martin and Osswald in [5], Vol. 2, for combining $s > 2$ sources. PCR6 coincides with PCR5 when one combines two sources. The difference between PCR5 and PCR6 lies in the way the proportional conflict redistribution is done as soon as three or more sources are involved in the fusion. For example, let's consider three sources with bba's $m_1(\cdot)$, $m_2(\cdot)$, and $m_3(\cdot)$, $A \cap B = \emptyset$ for the model of the frame Θ , and $m_1(A) = 0.6$, $m_2(B) = 0.3$, and $m_3(B) = 0.1$. With **PCR5** the partial conflicting mass $m_1(A) m_2(B) m_3(B) = (0.6)(0.3)(0.1) = 0.018$ is redistributed back to A and B only with respect to the following proportions respectively: $x_A^{PCR5} = 0.01714$ and $x_B^{PCR5} = 0.00086$ because the proportionalization is [8]:

$$\frac{x_A^{PCR5}}{m_1(A)} = \frac{x_B^{PCR5}}{m_2(B) m_3(B)} = \frac{m_1(A) m_2(B) m_3(B)}{m_1(A) + m_2(B) m_3(B)}$$

$$\text{that is } \frac{x_A^{PCR5}}{0.6} = \frac{x_B^{PCR5}}{(0.3)(0.1)} = \frac{0.018}{0.6 + 0.03} \approx 0.02857$$

$$\text{thus } x_A^{PCR5} = 0.60 (0.02857) \approx 0.01714 \\ x_B^{PCR5} = 0.03 (0.02857) \approx 0.00086$$

With the **PCR6 fusion rule**, the partial conflicting mass $m_1(A) m_2(B) m_3(B) = (0.6)(0.3)(0.1) = 0.018$ is redistributed back to A and B only with respect to the following proportions respectively: $x_A^{PCR6} = 0.0108$ and $x_B^{PCR6} = 0.0072$ because the PCR6 proportionalization is done as follows:

$$\frac{x_A^{PCR6}}{m_1(A)} = \frac{x_{B:2}^{PCR6}}{m_2(B)} = \frac{x_{B:3}^{PCR6}}{m_3(B)} = \frac{m_1(A) m_2(B) m_3(B)}{m_1(A) + m_2(B) + m_3(B)}$$

that is

$$\frac{x_A^{PCR6}}{0.6} = \frac{x_{B:2}^{PCR6}}{0.3} = \frac{x_{B:3}^{PCR6}}{0.1} = \frac{0.018}{0.6 + 0.3 + 0.1} \approx 0.018$$

thus

$$\begin{aligned} x_A^{\text{PCR6}} &= (0.6) (0.018) = 0.0108 \\ x_{B,2}^{\text{PCR6}} &= (0.3) (0.018) = 0.0054 \\ x_{B,3}^{\text{PCR6}} &= (0.1) (0.018) = 0.0018 \end{aligned}$$

and therefore with PCR6, one gets finally the following redistributions to A and B :

$$x_A^{\text{PCR6}} = (0.6) (0.018) = 0.0108$$

$$x_B^{\text{PCR6}} = x_{B,2}^{\text{PCR6}} + x_{B,3}^{\text{PCR6}} = 0.0054 + 0.0018 = 0.0072$$

From the implementation point of view, PCR6 is simpler to implement than PCR5. For convenience, Matlab codes of PCR5 and PCR6 fusion rules can be found in [5].

3.2 The DSMP Transformation

The DSMP probabilistic transformation is an alternative to the classical pignistic transformation which allows us to increase the probabilistic information content (PIC), i.e. to minimize the Shannon entropy, of the approximated subjective probability measure drawn from any bba. Justification and comparisons of DSMP(.) with respect to BetP(.) and to other transformations can be found in details in [65, 5 Vol. 3, Chap. 3].

BetP: The pignistic transformation probability, denoted BetP, offers a compromise between maximum of credibility Bel and maximum of plausibility Pl for decision support. The $BetP$ transformation is defined by $BetP(\emptyset) = 0$ and $\forall X \in G^\Theta \setminus \{\emptyset\}$ by

$$BetP(X) = \sum_{Y \in G^\Theta} \frac{c_{\mathcal{M}}(X \cap Y)}{c_{\mathcal{M}}(Y)} m(Y)$$

where G^Θ corresponds to the hyper-power set including all the integrity constraints of the model (if any). $G^\Theta = 2^\Theta$ if one adopts Shafer's model for Θ and $G^\Theta = D^\Theta$ (Dedekind's lattice) if one adopts the free DS model for

Θ [5]. $c_{\mathcal{M}}(Y)$ denotes the DSMP cardinal of the set Y , which is the number of parts of Y in the Venn diagram of the model \mathcal{M} of the frame Θ under consideration [5, Book 1, Chap. 7]. The BetP reduces to the Transferable Belief Model (TBM) when G^Θ reduces to classical power set 2^Θ when one adopts Shafer's model.

DSMP transformation is defined by $DSMP_\epsilon(\emptyset) = 0$ and $\forall X \in G^\Theta \setminus \{\emptyset\}$ by

$$DSMP_\epsilon(X) = \sum_{Y \in G^\Theta} \frac{\sum_{\substack{Z \subset X \cap Y \\ c(Z)=1}} m(Z) + \epsilon \cdot C(X \cap Y)}{\sum_{\substack{Z \subset Y \\ c(Z)=1}} m(Z) + \epsilon \cdot C(Y)} m(Y)$$

where $C(X \cap Y)$ and $C(Y)$ denote the cardinals of the sets $X \cap Y$ and Y respectively; $\epsilon \geq 0$ is a small number which allows to reach a highest PIC value of the approximation of $m(\cdot)$ into a subjective probability measure. Usually $\epsilon = 0$, but in some particular degenerate cases, when the $DSMP_{\epsilon=0}(\cdot)$ values cannot be derived, the $DSMP_{\epsilon>0}$ values can however always be derived by choosing ϵ as a very small positive number, say $\epsilon = 1/1000$ for example in order to be as close as we want to the highest value of the PIC. The smaller ϵ , the better/bigger PIC value one gets. When $\epsilon = 1$ and when the masses of all elements Z having $C(Z) = 1$ are zero, $DSMP_{\epsilon=1}(\cdot) = BetP(\cdot)$.

4 Example/Simulation

We use the SENSIT data which was described above and which provides an unstructured data analysis. To perform the data management we use data mining [66] techniques such as a *support vector machine* (SVM) [67, 68] to process the unstructured data. Through analysis, we can determine the optimum use of the data given environmental conditions (i.e. obscurations) and sensor's capabilities to detect a moving target.

Figure 3 shows the methodology of comparison. A key comparison is made between combining all the acoustic and seismic data together for testing and training via the SVM versus using the outputs from the acoustic and seismic data separately from which conflicts in classification are detected and sent to DS and DSMT processing.

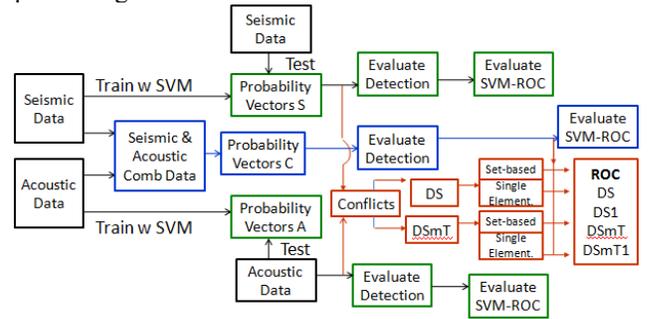


Figure 3. Experimentation Flow.

4.1 Data Processing

We compare two cases of (1) processing the data separately and (2) jointly processing the acoustic and seismic results **Figure 4** shows the case of the acoustic results.

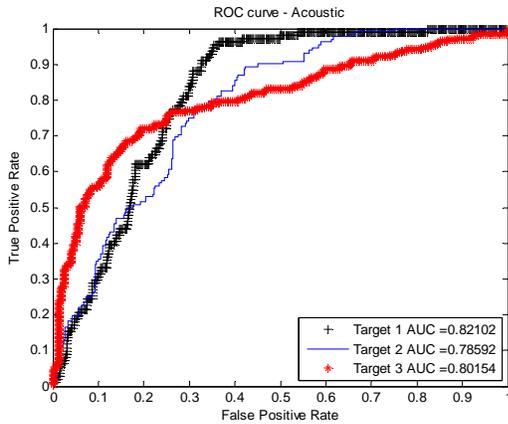


Figure 4. Acoustic Results.

Figure 5 demonstrates the results for the seismic results. Note that for the data set, the seismic results have a lower probability of false alarms for target 3 and target 2; however, target 2 exhibits more confusion.

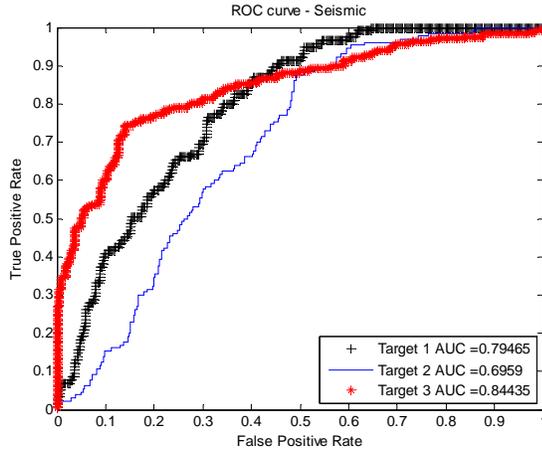


Figure 5. Seismic Results.

Next we explore the case of the joint seismic and acoustic data management and utilize SVM for classification, shown in Figure 6. Note the false alarm reduction which is desired by users.

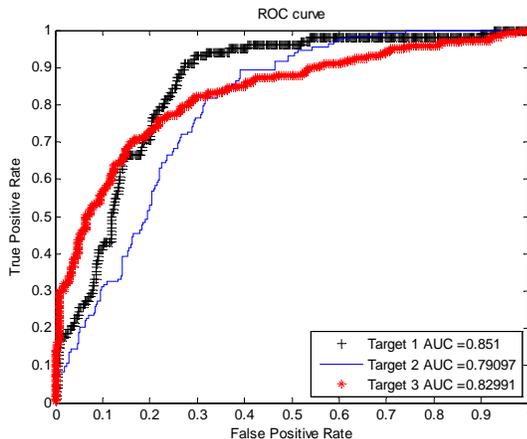


Figure 6. Combined Results

In general, the joint analysis supports better decision making as confidence was PD was improved for a constant false alarm rate, accuracy was improved as to the target location from joint spatial measurements, and timeliness in decision making as fewer measurements were needed to confirm the target ID (i.e. decision made with two modalities required fewer measurements than that of a single modality).

4.2 Application of DS

Below, we show the results of the application of DS methods. Given a training and prediction results in a combined probability, we have for target1, target2, and target3 a vector of $\mathbf{P} = [P_1 P_2 P_3]$. Based on the prediction results from the SVM, there are many conflicts of the sensor decision based on the maximum probability. When a conflict occurs, it would be better suited to acknowledge the conflict and then redistribute the probabilities based on a set notation. In this case, the focal elements are $\Phi = [\theta_1, \dots, \theta_7] = ['1', '1\cap 2', '2', '2\cap 3', '3', '1\cap 3', '1\cap 2\cap 3']$. Using the analysis by Martin, we conduct an analysis over the set criterion. Figure 7 shows that a significant reduction false alarms; however, the overall classification as measured by the area under the curve (AUC) is less than that of the SVM by itself. Thus, there is a trade off when using DS for reducing the PD for low FA versus the overall classification analysis.

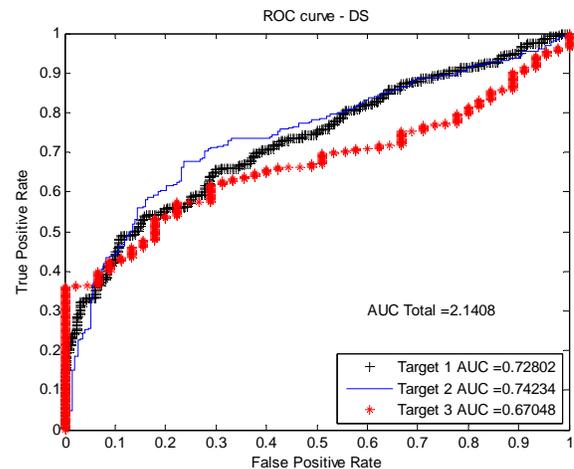


Figure 7. DS allowing for set declarations.

To explore a comparison of approaches, we utilized the bba and forced the evidential reasoned to choose a single target. From this analysis, the AUC improves in comparison to the SVM approaches which are a forced choice analysis. Figure 8 plots the DS (for one target designation).

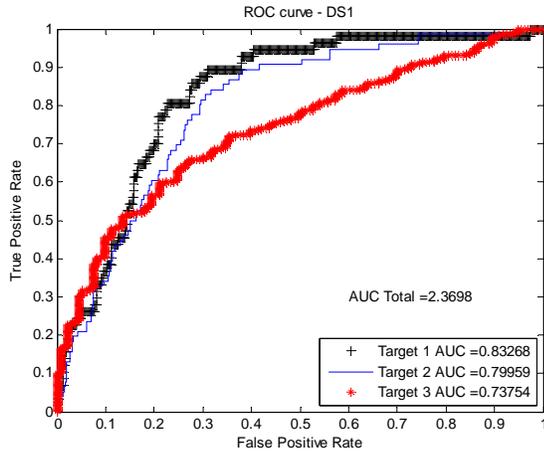


Figure 8. DMST Single Target Detection.

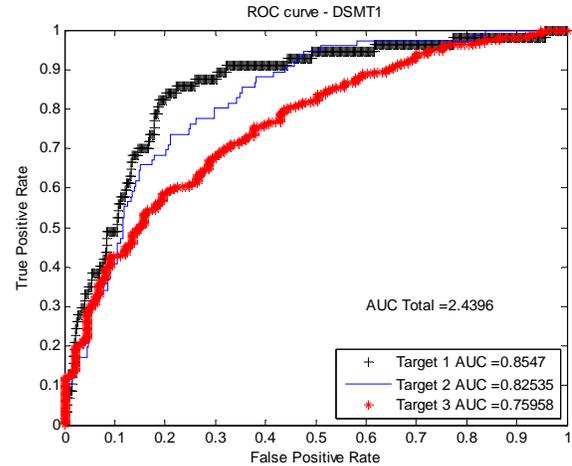


Figure 10. DMST Single Target Detection.

4.3 Application of DSMT

DMST, as described above, improves on the methods of conflict redistribution. In this case, there were slight alterations in the bba comparisons; however with the heuristic logic, changes resulted in the classification that was comparable to the complete SVM fusion analysis.

Figure 9 presents the DSMT results for set declaration and Figure 10 shows the case of a forced target choice from the DSMT. From these plots, we can see that the set-based approach improves the detection for low false alarm rates; however for high false alarm rates, the detection probability is increased over all false alarm rates. Using the maximum of the target bba provides an analysis threshold that renders the DSMT comparable to a SVM (which is allowed to train over all the data available).

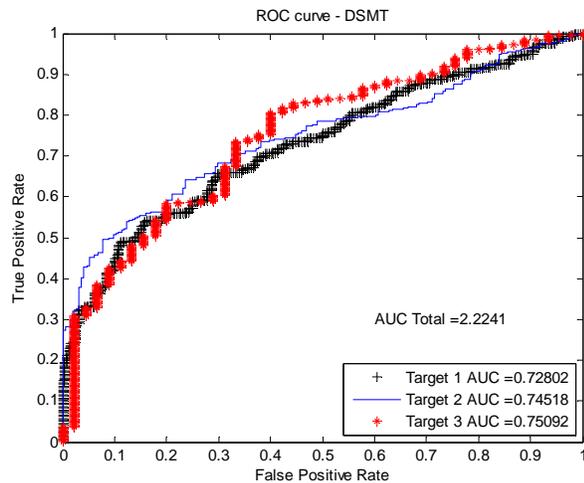


Figure 9. DSMT allowing for set declarations.

In the table below, we look at the entire analysis using the area under the ROC (AUC) as a key metric in the analysis. Additionally, there are cases in which the maximum AUC and minimum AUC are improved but the overall analysis (Total AUC) varies. We see from the comparison that the DS and DSMT methods can improve single target detection; however the SVM alone (run over all the data) does perform slightly higher in the information fusion case.

Table 1: AUC Comparisons of SVM, DS, and DSMT

| Method | Min AUC | Max AUC | Total AUC |
|--------------|--------------|--------------|--------------|
| A-SVM | 0.786 | 0.821 | 2.401 |
| S-SVM | 0.696 | 0.844 | 2.335 |
| C-SVM | 0.791 | 0.851 | 2.472 |
| DS | 0.671 | 0.742 | 2.141 |
| DS1 | 0.738 | 0.833 | 2.371 |
| DSMT | 0.728 | 0.751 | 2.224 |
| DSMT1 | 0.760 | 0.855 | 2.440 |

A – Acoustic, S-Seismic, C-Combination

5 Conclusions

We have explored DS and DSMT methods for seismic and acoustic information fusion. The goal of the paper was a new application of the existing techniques presented by Martin and Durate for further demonstration of the various modifications to the DS methods. Using the initial results, the use of DSMT can be tailored to the seismic and acoustic sensors which demonstrate high conflicts in decision outputs as they measure different target target phenomenologies. We utilized a Bayesian basic belief assignment (bba) with only singleton as focal elements which from the P vectors of the target probabilities. Future work will use non-Bayesian approaches to get the bbas.

Information theoretic measures [69] and tracking analysis [70] can support the sensor and data management as well as determine the Quality of Information and Quality of Service needs. Use of the *Area Under the*

Curve (AUC) provides decision support for situational awareness for command and control from which we can extend to higher dimensions [71]. Various other sources of soft data (human reports) can be combined with the hard (physics-based sensing) [72] to update the sensor management, placement, and reporting of the situation based on the context and the needs of users such as measures of effectiveness for mission support.

Acknowledgement

Advance in research is accelerated with the helpfulness of previous researchers. We would like to thank **Marco. F. Durate** for the correspondence in the data and preliminary code. The key to the paper is the documentation and code from **Arnaud Martin** for which he his code is freely available on the web at <http://bfas.iutlan.univ-rennes1.fr/news.html>.

6 References

- [1] M. F. Duarte and Y. H. Hu, "Vehicle Classification in distributed sensor networks," *J. Parallel Distributed Computation*, 64, No7, 2004.
- [2] A. Martin and C. Osswald, "Generalized Proportion conflict redistribution rule applied to sonar imagery and radar targets classification," in *Adv. and Appl. of DSMT for Information Fusion*, Vol. 2, (Eds.) J. Dezert and F. Smarandache, 2006.
- [3] E. P. Blasch "Assembling an Information-fused Human-Computer Cognitive Decision Making Tool," *IEEE Aerospace and Electronic Systems Magazine*, June 2000.
- [4] E. Blasch, P. Valin, and E. Bosse, "Measures of Effectiveness for High-Level Fusion", *Fusion10*, 2010.
- [5] J. Dezert and F. Smarandache, *Advances and applications of DSMT for information fusion (Collected works)*, Vols. 1-3, American Research Press, 2004–2009. <http://www.gallup.unm.edu/~smarandache/DSMT.htm>
- [6] J. Dezert, "Foundations for a new theory of plausible and paradoxical reasoning", *Information & Security, An Int'l J.*, ed. by Prof. Tzv. Semerdjiev, CLPP, Bulg. Acad. of Sciences, Vol. 9, 2002.
- [7] J. Dezert and F. Smarandache, "On the generation of hyper-powersets for the DSMT," *Proc. Fusion03*, July 2003.
- [8] J. Dezert and B. Pannetier, "A PCR-BIMM filter for maneuvering target tracking," *Fusion10*, 2010.
- [9] G. Shafer, *A Mathematical Theory of Evidence*. Princeton, NJ: Princeton Univ. Press, 1976.
- [10] P. Smets, "Analyzing the Combination of Conflicting Belief Functions, 2005.
- [11] M. Daniel, "The MinC Combination of Belief Functions, derivation and formulas," *Tech Report No. 964*, Acad. Sci of the Czech Republic, June 2006.
- [12] A. Josang and M. Daniel, "Strategies for Combining Conflict Dogmatic Beliefs," *Fusion06*, 2006.
- [13] M. Daniel, "Generalization of the Classic Combination Rules to DSMT Hyper-Power Sets," *Information & Security, An Int'l J.*, Vol. 20, 2006.
- [14] F. Smarandache and J. Dezert, "Information fusion based on new proportional conflict redistribution rules," in *Proc. 8th Int. Conf. Inf. Fusion*, 2005.
- [15] M. C. Florea, J. Dezert, P. Valin, F. Smarandache, and A-L. Jousselme, "Adaptive combination rule and proportional conflict redistribution rule for information fusion," *Cogis '06 Conf.*, Paris, March 2006.
- [16] A. Martin, C. Osswald, J. Dezert, and F. Smarandache, "General Combination Rules for Qualitative and Quantitative Beliefs," *J. Adv. Information Fusion*, Vol. 3, No. 2, Dec. 2008.
- [17] P. Valin, P. Djiknavorian, and E. Bosse, "A Pragmatic Approach for the use of Dempster-Shafer Theory in Fusing realistic Sensor Data," *J. Adv. Information Fusion*, Vol. 5, No. 1, June 2010.
- [18] P. Djiknavorian, D. Grenier, and P. Valin, "Approximation in DSMT theory for fusing ESM reports," *Int. Workshop on Belief functions 2010*, Brest, France, April 2010.
- [19] Z. H. Lee, J. S. Choir, and R. Elmasri, "A Static Evidential Network for Context Reasoning in Home-Based Care," *IEEE Trans. Sys., Man, and Cyber-Part A; Sys & Humans*, Vol. 40, No. 6, Nov. 2010.
- [20] S. Kadambe and C. Daniell, "Sensor/Data Fusion Based on Value of Information," *Fusion03*, 2003.
- [21] S. Kadambe, "Power and Resource Aware Distributed Smart Fusion," Ch. 18 in *Advances and applications of DSMT for information fusion (Collected works) Vol. 1*, 2004.
- [22] H. Ling, L. Bai, E. Blasch, and X. Mei, "Robust Infrared Vehicle Tracking across Target Pose Change using L1 Regularization," *Fusion10*, 2010.
- [23] E. Blasch, S. Kondor, M. Gordon, and R. Hsu, "Georgia Tech Aerial Robotics team competition entry," *J. Aerial Unmanned Vehicle Systems*, May 1994
- [24] E. P. Blasch, "Flexible Vision-Based Navigation System for Unmanned Aerial Vehicles," *Proc. SPIE*. 1994.
- [25] D. Shen, G. Chen, J. Cruz, and E. Blasch, "A game Theoretic Data Fusion Aided Path Planning Approach for Cooperative UAV Control," *IEEE Aerospace Conf.*, Big Sky, MT, 1 March, 2008.
- [26] G. Seetharaman, A. Lakhota, E. Blasch, "Unmanned Vehicles Come of Age: The DARPA Grand Challenge," *IEEE Computer Society Magazine*, Dec 2006.
- [27] K. M. Lee, K.M., Z. Zhi, R. Blenis, and E. P. Blasch, "Real-time vision-based tracking control of an unmanned vehicle," *IEEE J. of Mechatronics - Intelligent Motion Control*, 1995
- [28] H. Durrant-Whyte & T. Bailey, "Simultaneous Localization and Mapping (SLAM): Part I The Essential Algorithms". *Robotics and Automation Magazine* **13**: 99–110, 2006.
- [29] P. K. Varshney, *Distributed Detection and Data Fusion*, Springer-Verlag, NY, 1997.
- [30] E. Blasch, I. Kadar, K. Hintz, J. Biermann, C. Chong, and S. Das, "Resource Management Coordination with Level 2/3 Fusion", *IEEE AES Magazine*, Mar. 2008.
- [31] E. Blasch, I. Kadar, J. Salerno, M. M. Kokar, S. Das, G. M. Powell, D. D. Corkill, and E. H. Ruspini, "Issues and challenges of knowledge representation and reasoning methods in situation assessment (Level 2 Fusion)", *J. of Adv. in Information Fusion*, Dec. 2006.
- [32] G. Chen, D. Shen, C. Kwan, J. Cruz, M. Kruger, and E. Blasch, "Game Theoretic Approach to Threat Prediction and Situation Awareness," *Advances in Journal for Information Fusion*, July 2008.
- [33] C. Liu, D. Grenier, A-L. Jousselme, and E. Bosse, "Reducing Algorithm Complexity for Computing an

- Aggregate Uncertainty Measure,” *IEEE Trans. on Sys Man and Cybernetics - A*, Vol. 37, No. 5, Sept 2007.
- [34] E. Blasch, M. Pribilski, *et. al.*, “Fusion Metrics for Dynamic Situation Analysis,” *Proc SPIE Vol. 5429*, 2004.
- [35] L. Bai and E. Blasch, “Two-Way Handshaking Circular Sequential k-out-of-n Congestion System,” *IEEE Journal of Reliability*, Mar 2008.
- [36] E. Blasch, “Derivation of a Reliability Metric for Fused Data Decision Making,” *IEEE NAECON Conf.*, July 2008.
- [37] S. Zahedi and C. Bisdikian, “A Framework for QOI-inspired analysis for sensor network deployment planning,” *Proc Wireless Internet CON*, 2007.
- [38] R. Anthony, *Principles of Data Fusion Automation*, Artech House, 1995.
- [39] S. Blackman and R. Popoli, *Design and Analysis of Modern Tracking Systems*, Artech House, 1999.
- [40] D. L. Hall and S. A. McMullen, *Mathematical Techniques in Multisensor Data Fusion*, Artech House, 2004.
- [41] E. Blasch and T. Connare, “Improving Track maintenance Through Group Tracking,” *Proc on Estimation, Tracking, and Fusion; Tribute to Y. Bar Shalom*, 2001.
- [42] C. Yang, E. Blasch, & M Bakich, “Nonlinear Constrained Tracking of Targets on Roads”, *Fusion05*, 2005.
- [43] C. Yang and E. Blasch, “Fusion of Tracks with Road Constraints,” *Advances in Journal for Information Fusion*, Sept. 2008.
- [44] C. Yang and E. Blasch, “Kalman Filtering with Nonlinear State Constraints”, *IEEE Transactions AES*, Vol. 45, No. 1, Jan. 2009.
- [45] E. P. Blasch, *Derivation of a Belief Filter for Simultaneous HRR Tracking and ID*, Ph.D. Thesis, Wright State University, 1999.
- [46] C. Yang, and E. Blasch, W. Garber, and R. Mitchell, “A Track-ID Maneuver Indicator from Target’s Range-Doppler Image,” *J. Adv. in Information Fusion*, July, 2007.
- [47] T. Wang, Z. Zhu, and E. Blasch, “Bio-Inspired Adaptive Hyperspectral Imaging for real-Time Target Tracking “ *IEEE Sensors Journal*, 2009.
- [48] A. Bornstein, T. Damarla, J. Lavery, F. Morelli, and E. Schmeisser, “Remote Detection of Covert Tactical Adversarial Intent of Individuals in Asymmetric Operations,” *ARL Tech Report ARL-SR-197* April 2010.
- [49] M. F. Duarte and Y. H. Hu, “Vehicle Classification in distributed sensor networks,” *J. Parallel Distributed Computation*, 64. No7, 2004.
- [50] M. Duarte and Y-H Hu, “Distance Based decision Fusion in a Distributed Wireless Sensor Network” *Telecommunication Systems*, Vol. 26 No. 2-4, 2004.
- [51] T. Clouqueur, P. Ramanathan, K. K. Saluja, H-C Wang, “Value-Fusion versus Decision-Fusion for Fault tolerance in Collaborative Target Detection in Sensor Networks,” *Fusion01*, 2001.
- [52] D. Li, K. D. Wong, Y. H. Hu, and A. M. Sayeed, “Detection, Classification and Tracking of Targets in Distributed Sensor Networks,” *IEEE Sig Processing Magazine*, 2002.
- [53] R. R. Brooks, P. Ramanathan, and A. M. Sayeed, “Distributed Target Classification and Tracking in Sensor Networks,” *Proc of IEEE*, 2003.
- [54] S. Kadambe and C. Daniell, “Theoretic Based Performance of Distributed Sensor Networks”, *AFRL-IF-RS-TR-2003*, 231, October 2003.
- [55] H. Xing, F. Li, H. Xiao, Y. Wang, and Y. Liu, “Ground Target Detection, Classification, and Sensor Fusion in Distributed Fiber Seismic Sensor Networks,” *Proc SPIE*, vol. 6830, 2007.
- [56] G. M. Jacyna, C. T. Christoi, B. George, and B. F. Necioglu, “Netted Sensor-based Vehicle Acoustic Classification at Tier 1 nodes,” *Proc SPIE*, 2005.
- [57] F. Valenta and H. Hermansky, “Combination of Acoustic Classifiers based on Dempster-Shafer Theory of Evidence,” *IEEE ICASSP Conf.*, 2007.
- [58] E. P. Blasch, P. Maupin, and A-L Joussetme, “Sensor-based Allocation for path Planning and Area Coverage using UGSs”, *IEEE NAECON 2010*, 2010.
- [59] L. Kuncheva, *Combining Pattern Classifiers: Methods and Algorithms*, John Wiley and Sons, 2004.
- [60] M. Wei, G. Chen, J. Cruz, L Haynes, M. Kruger, and E. Blasch, “A decentralized Approach to Pursuer-Evader Games with Multiple Superior Evaders in Noisy Environments,” *Advances in Journal for Information Fusion*, June 2007.
- [61] M. Wei, G. Chen, J Cruz, L. Haynes, M. Chang, and E. Blasch, “Confrontation of Jamming and Estimation in Pursuit-Evasion Games with Multiple Superior Evaders,” *AIAA Journal of Aerospace Computing*, Aug 2006.
- [62] I. Kadar, E. Blasch, and C. Yang, “Network and Service Management Effects on Distributed Net-Centric Fusion Data Quality,” July, *Fusion08*, 2008.
- [63] H. Chen, G. Chen, E. Blasch, and T. Schuck, "Robust Track Association and Fusion with Extended Feature Matching", invited Chapter in *Optimization & Cooperative Ctrl. Strategies*, M.J. Hirsch et al. (Eds.); LNCIS 381, pp. 319–354, Springer-Verlag Berlin Heidelberg 2009.
- [64] J. Dezert, F. Smarandache, “Non Bayesian conditioning and deconditioning,” *Int. Workshop Belief Functions, Brest*, France, April 2010.
- [65] J. Dezert, F. Smarandache, “A new probabilistic transformation of belief mass assignment,” *Proc. Fusion08*, 2008.
- [66] I. Witten and E. Frank, *Data Mining: Practical machine learning tools and techniques*, Morgan Kaufmann, San Francisco, 2005.
- [67] Chih-Chung Chang and Chih-Jen Lin, LIBSVM : a library for support vector machines, 2001. Software available at <http://www.csie.ntu.edu.tw/~cjlin/libsvm>
- [68] R.-E. Fan, P.-H. Chen, and C.-J. Lin. “Working set selection using second order information for training SVM”, *Journal of Machine Learning Research* 6, 1889-1918, 2005.
- [69] H. Chen, G. Chen, E. Blasch, and P. Douville, “Information Theoretic Measures for Performance Evaluation and Comparison ,” *ISIF Conf. Fusion09*, 2009.
- [70] O. Straka, M Flidr, J. Dunik, M, Simandl, and E. P. Blasch, “Nonlinear Estimation Framework in Target Tracking,” *Fusion10*, 2010.
- [71] S. Alsing, E. P. Blasch, and R. Bauer, “3D ROC Surface concepts for Evaluation of Target Recognition algorithms faced with the Unknown target detection problem,” *Proc. SPIE, Vol. 3718*, Orlando, FL, 13-17 April 1999.
- [72] E. P. Blasch, É. Dorion, P. Valin, E. Bossé, and J. Roy, “Ontology Alignment in Geographical Hard-Soft Information Fusion Systems,” *Fusion10*, 2010.